



# PRODUCT CATALOG



Scan for more  
details



## 12V 2.0AH COMPACT DRILL DRIVER

### DCD700D2

Voltage	12V Max
Battery Capacity	2.0 Ah
Max Torque (Hard/Soft)	24/15 Nm
Chuck Capacity	10 mm
Max Drilling Capacity (Wood)	20 mm
Max Drilling Capacity (Metal)	10 mm
Weight (Bare Tool)	0.91 Kg
No Load Speed	0 - 400 / 1500 rpm



ALSO AVAILABLE AS:

**DCD700D2A (WITH 109 PCS ACCESSORY KIT)**

## 12V 2.0AH CORDLESS DRILL DRIVER.

### DCD710D2

Voltage	12V Max
Battery Capacity	2.0 Ah
Max Torque (Hard/Soft)	24/15 Nm
No Load Speed	0-400 / 1500 rpm
Chuck Capacity	1-10 mm
Max. Drilling Capacity [Wood / Metal]	20 / 10 mm
Weight (Bare Tool)	1.1 kg
Length x Height	185 x 195 mm



## 12V 2.0AH BURSHLESS MULTI-HEAD DRILL

### DCD703D2

Motor Type	Brushless
Voltage V	12V Max
No Load Speed	0-425 / 1500 rpm
Max Torque (Hard / Soft)	57.5 / 25.5 Nm
Chuck Capacity	10 mm
Max Drilling Capacity (Wood)	20 mm
Max Drilling Capacity (Metal)	10 mm
Weight (Bare Tool)	0.73 Kg



**BRUSHLESS**

**12V XR**

**20V MAX 2AH COMPACT BRUSHLESS DRILL DRIVER**

**DCD7771D2**

Voltage	20V Max
Battery Capacity	2.0 Ah
Max Torque (Hard)	65 Nm
Max Torque (Soft)	26 Nm
No Load Speed	0-500 / 1750 rpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal]	30/13 mm
Weight (Bare Tool)	1.15 kg
Length x Height	192 x 198 mm



**20V MAX 1.5AH COMPACT BRUSHLESS DRILL DRIVER**

**DCD708S2T**

Voltage	20V Max
Battery Capacity	1.5 Ah
Max. Torque (Hard/Soft)	65/26Nm
No Load Speed	0-450 / 1650 rpm
Chuck Capacity	1.5-13 mm
Drilling Capacity [Wood/Metal]	35/13 mm
Weight (Bare Tool)	1.45 kg
Length x Height	160 x 198 m



Available in T Stak Box

**20V MAX 1.5AH COMPACT DRILL DRIVER**

**DCD771S2**

Voltage	20V Max
Battery Capacity	1.5 Ah
Max. Torque (Hard)	42 Nm
Max. Torque (Soft)	24 Nm
No Load Speed	0-450 / 1500 rpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal]	25/13 mm
Weight (Bare Tool)	1.65 kg
Length x Height	219 x 191 mm



## 12V MAX 2.0AH HAMMER DRILL DRIVER

### DCD716D2

Voltage	12V Max
Battery Capacity	2.0 Ah
Max. Torque (Hard / Soft)	30 / 16 Nm
No Load Speed	0-400 / 1500 rpm
Beats per Minute	0-6000 / 22500 bpm
Chuck Capacity	1-10 mm
Max. Drilling Capacity [Wood / Metal / Masonry]	20 / 10 / 8 mm
Weight (Bare Tool)	1.18 kg
Length x Height	200 x 210 mm



## 20V MAX 2.0AH HAMMER DRILL DRIVER

### DCD776D2

Voltage	20V Max
Battery Capacity	2.0 Ah
Max. Torque (Hard)	42 Nm
Max. Torque (Soft)	24 Nm
No Load Speed	0-450 / 1800 rpm
Beats Per Minute	0-7650 / 25500 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal/Masonry]	30/13/13 mm
Weight (Bare Tool)	1.7 kg
Length x Height	228 x 191 mm



## 20V MAX 2.0AH COMPACT BRUSHLESS HAMMER DRILL

### DCD7781D2

Voltage	20V Max
Battery Capacity	2.0 Ah
Max Torque (Hard)	65 Nm
Max Torque (Soft)	26 Nm
No Load Speed	0-500 / 1750 rpm
Beats per Minute	0-8500 / 29750 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal/Masonry]	38/13/13 mm
Weight (Bare Tool)	1.18 kg
Length x Height	204 x 198 mm



**20V MAX 1.5AH COMPACT BRUSHLESS HAMMER DRILL DRIVER**

**DCD709S2T**

Voltage	20V Max
Battery Capacity	1.5 Ah
Max. Torque (Hard/Soft)	65/26 Nm
No Load Speed	0-450 / 1650 rpm
Beats Per Minute	0-7650 / 28050 bpm
Chuck Capacity	1.5-13 mm
Drilling Capacity [Wood/Metal/Masonry]	30/13/13 mm
Weight (Bare Tool)	1.2 kg
Length x Height	175 x 198 mm

Available in T Stack Box



**20V MAX 5.0AH PREMIUM BRUSHLESS HAMMER DRILL DRIVER**

**DCD996P2**

Voltage	20V Max
Battery Capacity	5.0 Ah
Max. Torque (Hard)	95 Nm
Max. Torque (Soft)	66 Nm
No Load Speed	0-450/1300/2000 rpm
Beats Per Minute	0-8600/25500/38250 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal/Masonry]	55/15/16 mm
Weight (Bare Tool)	2.2 kg
Length x Height	213 x 208 mm



ALSO AVAILABLE AS:

**DCD996NT (with T Stack box)**



**12V 2.0AH COMPACT BRUSHLESS IMPACT DRIVER**

**DCF801D2**

Motor Type	Brushless
Voltage	12V
Battery Capacity	2.0 Ah
No-load speed	0-2850 rpm
Precision Mode	0-950 min <sup>-1</sup>
Low Mode	0-1950 m n <sup>-1</sup>
High Mode	0-2850 min <sup>-1</sup>
Impact rate	0-3600 min <sup>-1</sup>
Max. torque	163 Nm
Tool holder	6.35 mm
Weight (Bare Tool)	0.8 kg



**BRUSHLESS**

**12V XR**

**18V 2.0AH 3 SPEED BRUSHLESS IMPACT DRIVER**

**DCF850D2**

Motor Type	Brushless
Voltage	18V
Battery Capacity	2.0 Ah
Max. Torque	205 Nm
No Load Speed	
Mode 1	0-1000 rpm
Mode 2	0-2800 rpm
Mode 3	0-3250 rpm
Impact Rate	0-3800 ipm
Mode Select	3 Speed
Length	100 mm
Weight (Bare Tool)	0.95 kg



**BRUSHLESS**

**18V XR**

**18V XR 3.0AH IMPACT BRUSHLESS DRIVER KIT**

**DCF809L2T**

Motor Type	Brushless
Voltage	18V
Battery Capacity	3.0 Ah
Max. Torque	190 Nm
No Load Speed	0-2800 rpm
Impacts Per Minute	0-3200 ipm
Max. Bolt Dia.	M12
Tool Holder	6.35 mm (1/4")
Weight (Bare Tool)	1.25 kg
Length x Height	130 x 236 mm

**Available in T Stak Box**



**BRUSHLESS**

**18V XR**

**12V 2.0AH SUB-COMPACT IMPACT WRENCH**

**DCF902D2**

Motor Type	Brushless
Voltage	12V
Battery Capacity	2.0 Ah
Tool Holder	3/8"/9.5 mm
Max. Torque	168 Nm
No Load Speed	
Precision Mode	0-2850 min <sup>-1</sup>
Low Mode	0-1000 min <sup>-1</sup>
High Mode	0-2850 min <sup>-1</sup>
Weight (Bare Tool)	0.8 kg
Length x Height	125 x 188 mm



**20V MAX 5.0AH 1/2" BRUSHLESS COMPACT IMPACT WRENCH**

**DCF911P2**

Motor Type	Brushless
Voltage V	20V Max
Battery Capacity	5 Ah
No-load speed	0-2850 rpm
Impact rate	0-3250 ipm
Max tightening torque	338 Nm
Max breakaway torque	542 Nm
Tool holder	12.7 mm
Weight (Bare Tool)	1.0 Kg



**20V MAX 4.0AH 1/2" COMPACT IMPACT WR - DETENT**

**DCF922M2**

Motor Type	Brushless
Voltage V	20V Max
Battery Capacity	4.0 A
No-load speed	0-2500 rpm
Impact rate	0-3550 bpm
Max tightening torque	406 Nm
Max breakaway torque	610 Nm
Tool holder	12.7 mm
Weight (Bare Tool)	1.1 Kg



ALSO AVAILABLE AS:

**DCF922N**

**20V MAX 5.0AH 1/2" MID-RANGE IMPACT WRENCH**

**DCF892P2T**


Volatage	20V Max
Battery Capacity	5.0 Ah
No Load Speed	0-2000 rpm
Imapct rate	0-3250 bpm
<b>Max Tightening Torque</b>	
Precision Wrench™ mode	812 Nm
Low Mode	136 Nm
Medium mode	406 Nm
High mode	812 Nm
Max breakaway torque	1084 Nm
Tool holder	12.7 mm
Weight (Bare Tool)	1.67 kg



**BRUSHLESS**

**18V XR**

Available in T Stak Box

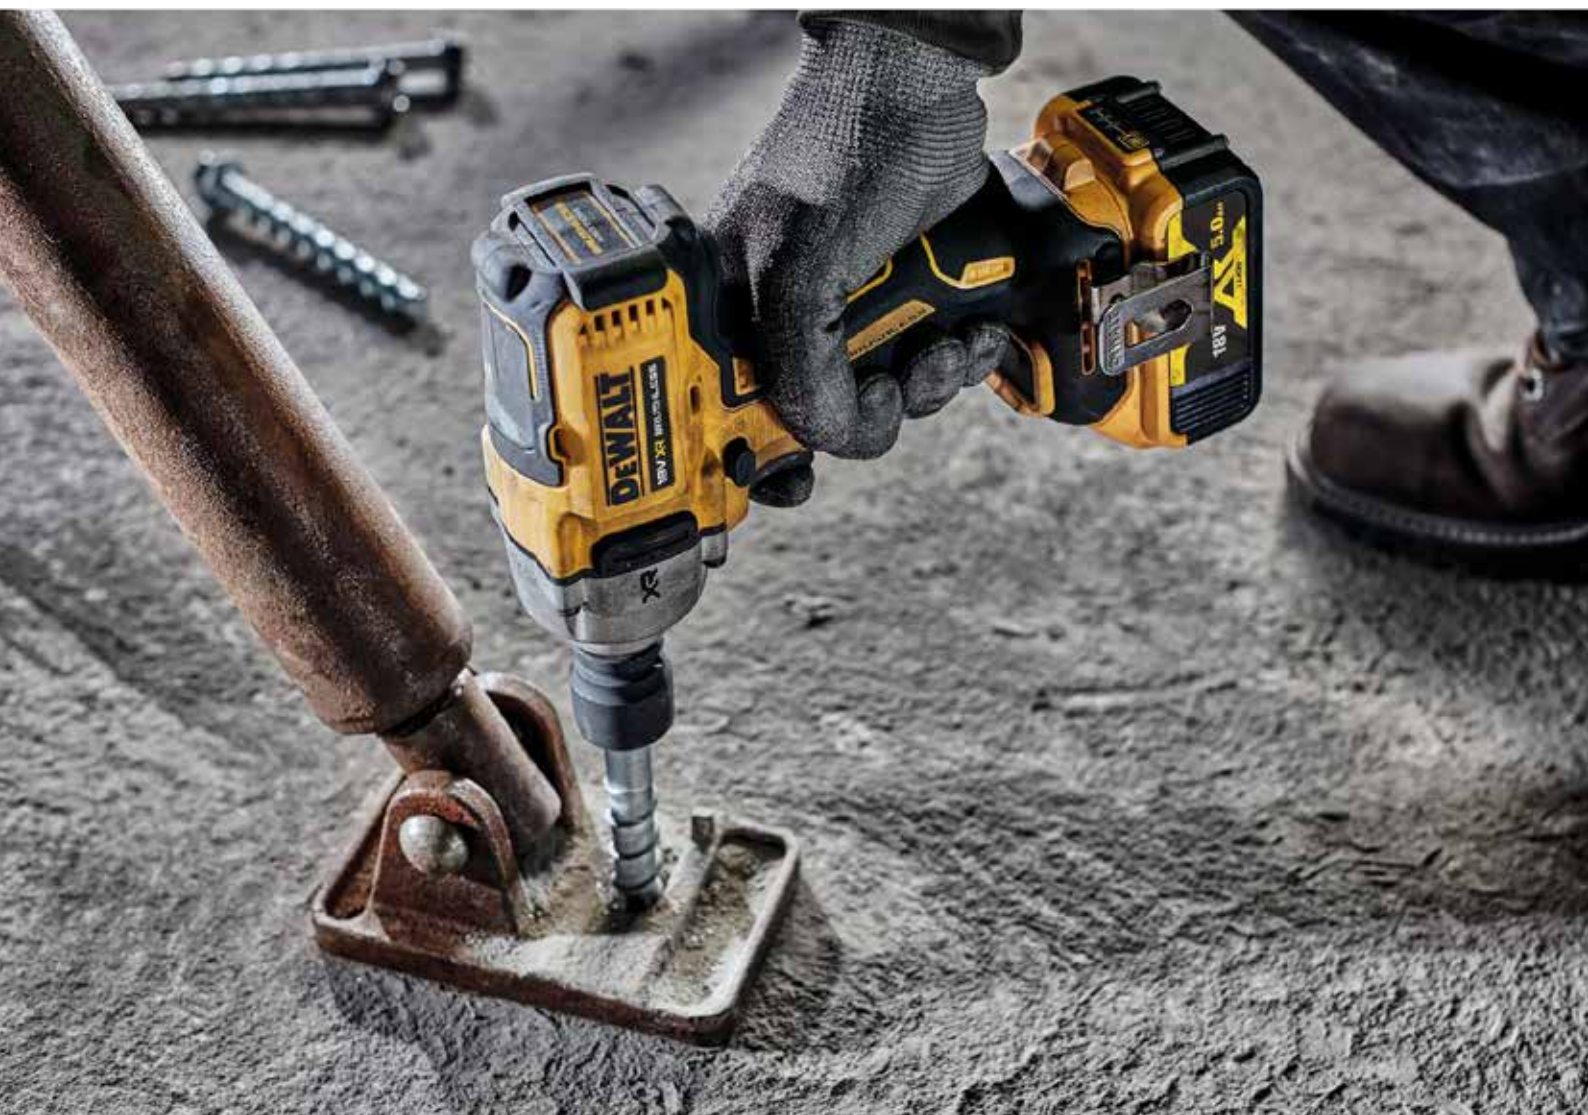

## 18V 4.0AH COMPACT BRUSHLESS HAMMER

### DCH172M2

Motor Type	Brushless
Voltage	18V
Battery Capacity	4.0 Ah
Tool Holder	SDS-Plus
Impact Energy (EPTA 05/2009)	1.4 J
No Load Speed	0-1060 rpm
Blows per Minute	0-4980 bpm
Optimum Drilling Capacity	4-10 mm
Max. Drilling Capacity [Concrete/Wood/Metal]	16/16/10 mm
Weight (Bare Tool)	1.78 kg
Length x Height	265 x 73 mm



## 18V 4.0AH BRUSHLESS SDS PLUS HAMMER

### DCH133M1

Motor Type	Brushless
Voltage	18V
Battery Capacity	4.0 Ah
Tool Holder	SDS-Plus
Max. Impact Energy	2.8 J
Impact Energy (EPTA 05/2009)	2.6 J
No Load Speed	0-1500 rpm
Blows Per Minute	0-5500 bpm
Optimum Drilling Capacity [Concrete]	4-14 mm
Max. Drilling Capacity [Concrete/Wood/Metal]	26/30/13 mm
Chipping Mode	Yes
Weight (Bare Tool)	2.3 kg
Length x Height	383 x 161 mm



ALSO AVAILABLE AS:

**DCH133NT**

## 18V 5.0AH BRUSHLESS SDS PLUS HAMMER

### DCH263P2

Motor Type	Brushless
Voltage	18V
Battery Capacity	5.0 Ah
Single impact energy	3.0 J
No Load Speed	0-1165 min <sup>-1</sup>
No-Load Impact Rate	0-4300 bpm
Maximum Core Drilling Capacity in Soft Brick	65 mm
Max. Drilling Capacity [Concrete/Wood/Metal]	28/30/13 mm
Collar Diameter	54 mm
Weight (Bare Tool)	2.7kg
Length x Height	125 x 188 mm



**18V 5.0AH BRUSHLESS SLIDE MAG KIT**

**DCG405P2**

Motor Type	Brushless
Voltage	18V
Battery Capacity	5.0 Ah
Disc Diameter DCG405P2 (XJ)	125 mm
Disc Diameter DCG405P2 (IN)	100 mm
No Load Speed	9000 rpm
Spindle Thread	M14 / M10
Switch Type	Slider
Weight (Bare Tool)	1.74 kg
Length x Height	310 x 125 mm




**BRUSHLESS**

**18V XR**

ALSO AVAILABLE AS :

**DCG405P2-IN (DISC DIAMETER: 100 MM)**

**DCG405P2-XJ (DISC DIAMETER: 125 MM)**

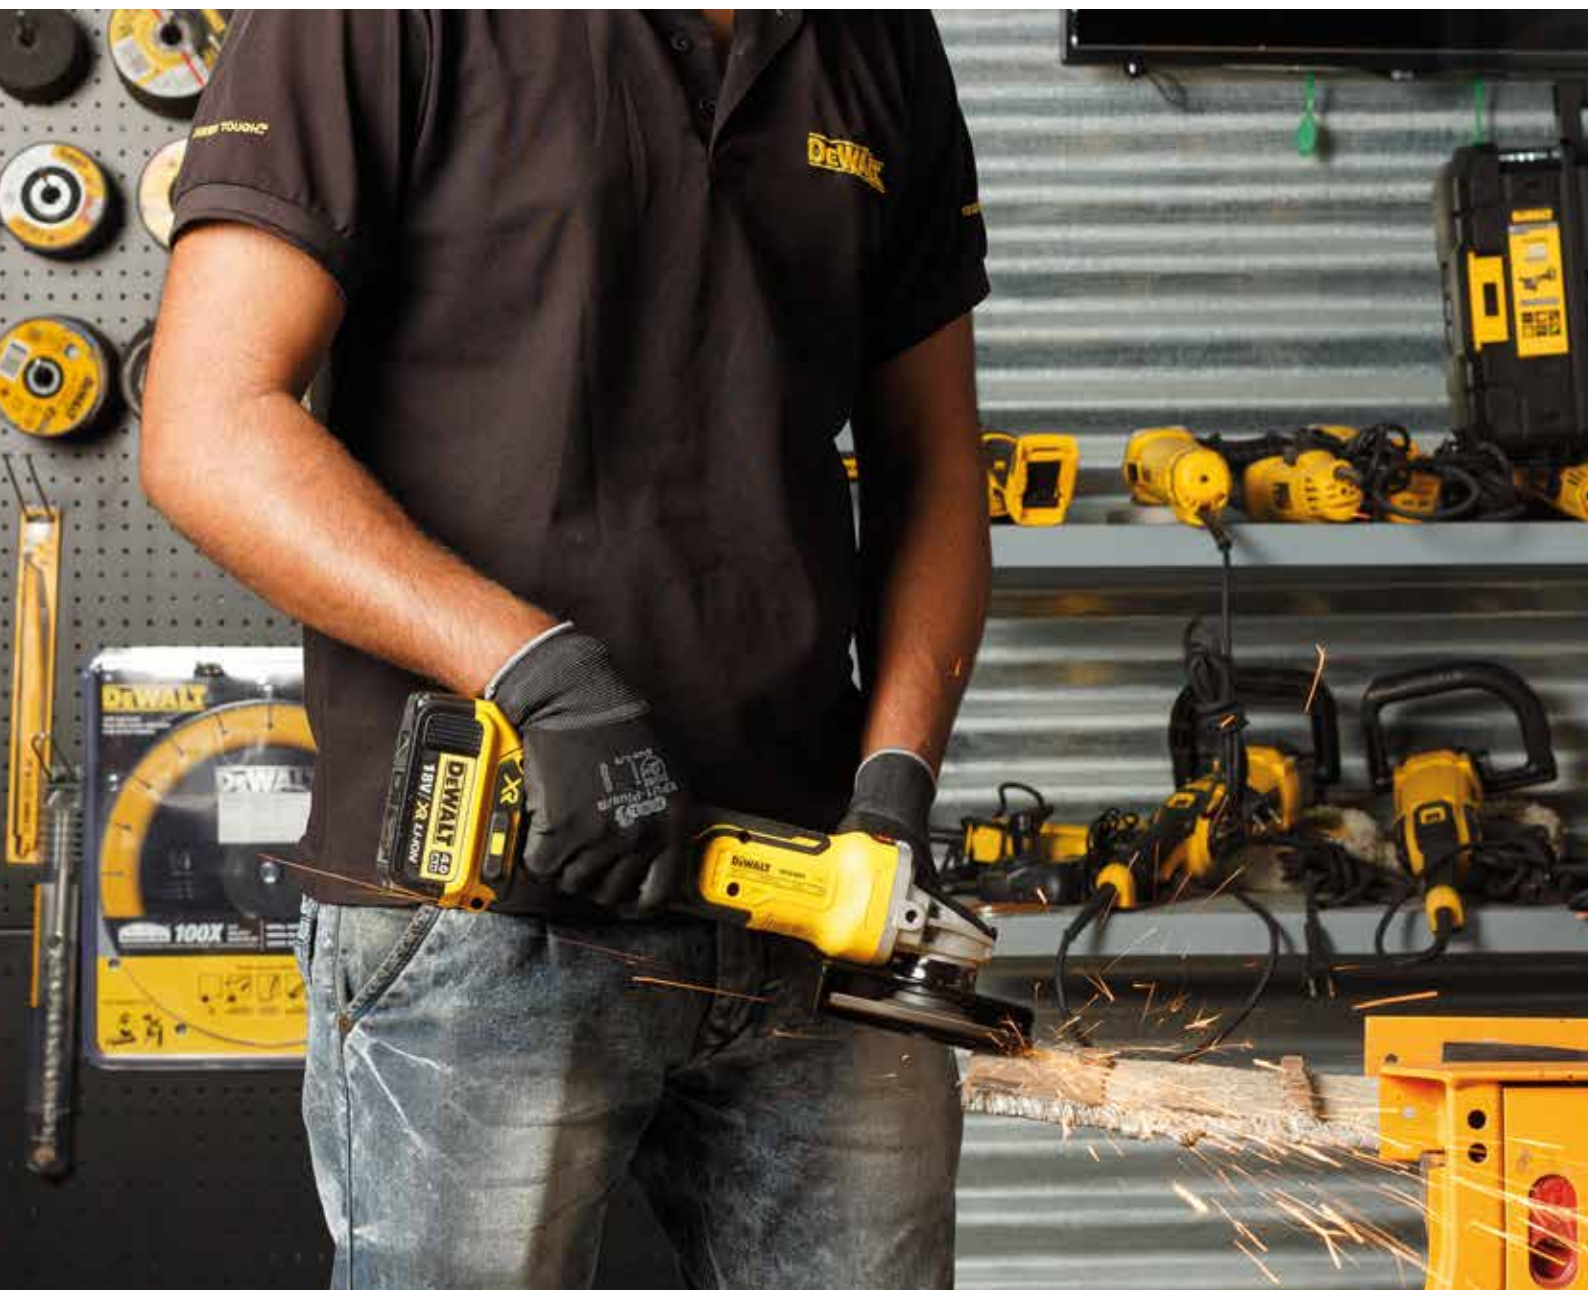

**20V MAX 5.0AH BRUSHLESS DUAL ACTION POLISHER**
**DCM848P2**

Motor Type	Brushless
Voltage V	20V Max
Battery Capacity	5.0 Ah
No Load Speed	2000 - 5500 rpm
Max. Disc Diameter	125 mm
Switch Type	Trigger
Variable Speed	Yes


**18V 5.0AH BRUSHLESS CONCRETE NAILER**
**DCN890P2**

Voltage	18V
Battery Capacity	5.0 Ah
Nail Diameter	2.6 - 3.7 mm
Nail Length	13 - 57 mm
Nail Width	5.6 - 6.4 mm
Magazine Angle	15°
Magazine Capacity	Up to 30 Nails
Magazine Loading	Underneath
Operating Mode	Sequential and Rapid Cycle
Nose Included	Non magnetic / Drywall nose
Weight (Bare Tool)	4.8 kg
Length x Height	415 x 390 mm


**18V XR 2.0AH 16GA FINISH NAILER**
**DCN660D2**

Voltage	18V
Battery Capacity	2.0Ah
Nail Diameter	1.6 mm
Nail Length	32 - 63 mm
Magazine Angle	20°
Magazine Capacity	110 Nails
Magazine Loading	Rear
Operating Mode	Bump and Sequential
Weight (Bare Tool)	2.8 kg
Length x Height	310 x 305 mm



**20V MAX BRUSHLESS DRILL DRIVER**

**DCD708N**

Voltage	20V Max
Max. Torque (Hard/Soft)	65/26Nm
No Load Speed	0-450 / 1650 rpm
Chuck Capacity	1.5-13 mm
Drilling Capacity [Wood/Metal]	35/13 mm
Weight (Bare Tool)	1.45 kg
Length x Height	160 x 198 mm



CORDLESS BARE TOOL - DRILL DRIVERS

**20V MAX BRUSHLESS HAMMER DRILL DRIVER**

**DCD709N**

Voltage	20V Max
Max. Torque (Hard/Soft)	65/26 Nm
No Load Speed	0-450 / 1650 rpm
Beats Per Minute	0-7650 / 28050 bpm
Chuck Capacity	1.5-13 mm
Drilling Capacity [Wood/Metal/Masonry]	30/13/13 mm
Weight (Bare Tool)	1.2 kg
Length x Height	175 x 198 mm



CORDLESS BARE TOOL - HAMMER DRILL DRIVERS

**20V MAX BRUSHLESS HAMMER DRILL DRIVER**

**DCD805N**

Motor Type	Brushless
Voltage V	20V Max
# of Speeds	2
No Load Speed	0 - 650 / 2000 rpm
Hammer Mode	0 - 11050 / 34000 bpm
Torque (Hard/Soft)	90 / 27 Nm
Chuck Capacity	1.5 - 13mm
LED	3-Mode
Weight (Tool only)	1.3 Kg
Length	163.8 / 177 mm
Width	63.5 mm
Drilling Capacity [Wood/Metal/Masonry]	55/13/13 mm



## 20V MAX BRUSHLESS IMPACT DRIVER

### DCF850N

Motor Type	Brushless
Voltage	20V Max
Fastening Torque	205 Nm
No Load Speed	0 - 1000 / 2800 / 3250 rpm
Impact Rate	0 - 3800 ipm
LED	3 LED, Halo Light Ring
Accessories	Belt Hook
Mode Select	3 Speed
Weight	0.9 Kg
Length	100 mm



## 20V MAX BRUSHLESS IMPACT WRENCH

### DCF911N

Motor Type	Brushless
Voltage	20V Max
No-load speed	0 - 2800 rpm
Impact rate	0 - 3250 ipm
Max tightening torque	338 Nm
Max breakaway torque	542 Nm
Tool holder	12.7 mm
Weight (Bare Tool)	1.0 Kg



**20V MAX 1/2" BRUSHLESS COMPACT IMPACT WR - DETENT**

**DCF922N**

Motor Type	Brushless
Voltage V	20V Max
No-load speed	0-2500 rpm
Impact rate	0-3550 bpm
Max tightening torque	406 Nm
Max breakaway torque	610 Nm
Tool holder	12.7 mm
Weight (Bare Tool)	1.1 Kg



**20V MAX 1/2" BRUSHLESS HT IMPACT WRENCH**

**DCF892N**

Volatage	20V Max
No Load Speed	0-2000 rpm
Imapact rate	0-3250 bpm
Max Tightening Torque	
Precision Wrench™ mode	812 Nm
Low Mode	136 Nm
Medium mode	406 Nm
High mode	812 Nm
Max breakaway torque	1084 Nm
Tool holder	12.7 mm
Weight (Bare Tool)	1.67 kg



**20V MAX 3/4" BRUSHLESS HT IMPACT WRENCH**

**DCF897N**

Motor Type	Brushless
Voltage V	20V Max
Max. Torque	136 / 407 / 950 Nm
Breakaway Torque	1627 Nm
No Load Speed	0 - 400 / 1200 / 1900 rpm
Impacts Per Minute	0 - 2400 ipm
Max. Bolt Diameter	M24
Tool Holder	3/4" (19 mm)
Length x Height	224 x 278 mm



## 20V MAX 1/2" BRUSHLESS HT IMPACT WRENCH

### DCF900N

Motor Type	Brushless
Voltage	20V Max
No Load Speed	0-2300 min <sup>-1</sup>
Impact rate	0-2200 min <sup>-1</sup>
Max Tightening Torque	
Precision Wrench™ Mode	1396 Nm
Low Mode	135 Nm
Medium Mode	813 Nm
High Mode	1396 Nm
Max Breakaway Torque	1898 Nm
Anvil Type	Hog Ring
Tool Holder	12.7 mm
Weight (Without Battery Pack)	2.9 Kg



## 20V MAX BRUSHLESS SAG

### DCG405N

Motor Type	Brushless
Voltage	18V
Disc Diameter DCG405P2 (XJ)	125 mm
Disc Diameter DCG405P2 (IN)	100 mm
No Load Speed	9000 rpm
Spindle Thread	M14 / M10
Switch Type	Slider
Weight (Bare Tool)	1.74 kg
Length x Height	310 x 125 mm



ALSO AVAILABLE AS :

**DCG405N-B1** (DISC DIAMETER: 100 MM)

**DCG405N-XJ** (DISC DIAMETER: 125 MM)



**26MM SDS PLUS CORDLESS HAMMER****DCH133N**

Motor Type	Brushless
Voltage	18V
Tool Holder	SDS-Plus
Max. Impact Energy	2.8 J
Impact Energy (EPTA 05/2009)	2.6 J
No Load Speed	0-1500 rpm
Blows Per Minute	0-5500 bpm
Optimum Drilling Capacity [Concrete]	4-14 mm
Max. Drilling Capacity [Concrete/Wood/Metal]	26/30/13 mm
Chipping Mode	Yes
Weight (Bare Tool)	2.3 kg
Length x Height	383 x 161 mm

**BRUSHLESS****18V XR**

**18V/54V 9.0AH BATTERY PACK (FLEXVOLT)**

**DCB609**



Voltage	18V / 54V
Battery Capacity	9.0Ah / 3.0Ah
Tool Compatibility	All 18V and 54V Li-Ion DEWALT Tools
Weight	1.25 Kg
Length x Height	135x95 mm

**18V/54V 12.0AH BATTERY PACK (FLEXVOLT)**

**DCB612**



Voltage	18V / 54V
Battery Capacity	12.0Ah / 4.0Ah
Tool Compatibility	All 18V & 54V Li-Ion DEWALT Tools
Weight	1.25 Kg
Length x Height	135x95 mm

**10.8V/18V MULTI VOLT COMPACT CHARGER**

**DCB107**



Tool Compatibility	All 12V Max & 18V Li-Ion DEWALT Tools
Weight	1.25 Kg
Charging Current	1.25A

**18V/54V FAST CHARGER**

**DCB118**



Voltage	18V (included Flexvolt)
Charging Current	8A
Weight	0.65 Kg
Length x Height	150 x 80 mm

**12V/20V MAX 2AH CHARGER**

**DCB1102**



Voltage	20V range
LED Indicators	2 Stage- 80% and 100%
Compact Charger	2A
Compatible	12V and 20V
Length	97.8 mm
Width	71.8 mm
Height	60 mm
Weight	0.27 mm

**12V/20V MAX 4AH CHARGER**

**DCB1104**



Voltage	20V range
LED Indicators	2 Stage- 80% and 100%
Compact Charger	4A
Compatible	12V and 20V
Length	149.5 mm
Width	114 mm
Height	66.9 mm
Weight	0.46 mm

**22MM 2 MODE SDS PLUS HAMMER, 2 KGS (MADE IN INDIA)**
**D25032B**

Power Input	710W
Max. Impact Energy	2.1 J
Impact Energy (EPTA 05/2009)	2.0 J
No Load Speed	0-1550 rpm
Blows Per Minute	0-5680 bpm
Optimum Drilling Capacity [Concrete]	4-12 mm
Max. Drilling Capacity [Concrete]	22 mm
Max. Drilling Capacity [Core bit/Wood/Metal]	50/30/13 mm
Operation Mode	Rotation/Hammering with rotation
Weight	2.5 Kg
Length x Height	330 x 210 mm
Vibration Level	13.6 m/s <sup>2</sup>


**MADE IN INDIA**
**22MM 3 MODE SDS PLUS HAMMER, 2 KGS (MADE IN INDIA)**
**D25033K**

Power Input	710W
Max. Impact Energy	2.1 J
Impact Energy (EPTA 05/2009)	2.0 J
No Load Speed	0-1550 rpm
Blows Per Minute	0-5680 bpm
Optimum Drilling Capacity [Concrete]	4-12 mm
Max. Drilling Capacity [Concrete]	22 mm
Max. Drilling Capacity [Core bit/Wood/Metal]	50/30/13 mm
Operation Mode	Hammering/Rotation/Hammering with rotation
Weight	2.5 Kg
Length x Height	330 x 210 mm
Vibration Level	13.6 m/s <sup>2</sup>


**MADE IN INDIA**
**26MM 3 MODE COMBINATION HAMMER, 2 KGS (MADE IN INDIA)**
**D25133K**

Power Input	800W
Max. Impact Energy	2.8 J
Impact Energy (EPTA 05/2009)	2.6 J
No Load Speed	0-1500 rpm
Blows Per Minute	0-5500 bpm
Optimum Drilling Capacity [Concrete]	4-14 mm
Max. Drilling Capacity [Concrete]	26 mm
Max. Drilling Capacity [Core bit/Wood/Metal]	50/30/13 mm
Operation Mode	Hammering/Rotation/Hammering with rotation
Weight	2.6 Kg
Length x Height	335 x 210 mm
Vibration Level	15.4 m/s <sup>2</sup>


**MADE IN INDIA**

## 28MM 3 MODE SDS PLUS COMBINATION HAMMER, 2 KGS

### D25143K

Power Input	900W
Max. Impact Energy	3.2 J
Impact Energy (EPTA 05/2009)	3.0 J
No Load Speed	0-1450 rpm
Blows Per Minute	0-5350 bpm
Optimum Drilling Capacity [Concrete]	4-18 mm
Max. Drilling Capacity [Concrete]	28 mm
Max. Drilling Capacity [Core bit/Wood/Metal]	65/30/13 mm
Operation Mode	Hammering/Rotation/ Hammering with rotation
Weight	3.0 Kg
Length x Height	340 x 210 mm
Vibration Level	14.9 m/s <sup>2</sup>



## 30MM 3 MODE SDS PLUS COMBINATION HAMMER, 3KGS

### D25333K

Power Input	950W
Max. Impact Energy	4.2 J
Impact Energy (EPTA 05/2009)	3.5 J
No Load Speed	0-1150 rpm
Blows Per Minute	0-5200 bpm
Optimum Drilling Capacity [Concrete]	6-20 mm
Max. Drilling Capacity [Concrete]	30 mm
Max. Drilling Capacity [Core bit/Wood/Metal]	65/30/13 mm
Operation Mode	Hammering/Rotation/ Hammering with rotation
Weight	3.7 Kg
Length x Height	355 x 250 mm
Vibration Level	6.9 m/s <sup>2</sup>



## 32MM 3 MODE SDS PLUS COMBINATION HAMMER, 4KGS

### D25413K

Power Input	1000W
Max. Impact Energy	4.9 J
Impact Energy (EPTA 05/2009)	4.2 J
No Load Speed	0-820 rpm
Blows Per Minute	0-4700 bpm
Optimum Drilling Capacity [Concrete]	6-22 mm
Max. Drilling Capacity [Concrete]	32 mm
Max. Drilling Capacity [Core bit/Wood/Metal]	100/32/13 mm
Operation Mode	Hammering/Rotation/ Hammering with rotation
Weight	4.2 Kg
Length x Height	370 x 250 mm
Vibration Level	8.2 m/s <sup>2</sup>



**40MM SDS MAX COMBINATION HAMMER, 5 KGS**

**D25481K**

Power Input	1050W
Max. Impact Energy	7.3 J
Impact Energy (EPTA 05/2009)	6.1 J
No Load Speed	540 rpm
Blows Per Minute	3150 bpm
Optimum Drilling Capacity [Concrete]	16-30 mm
Max. Drilling Capacity [Concrete]	40 mm
Max. Drilling Capacity [Core bit]	100 mm
Operation Mode	Hammering/Rotation/ Hammering with rotation
Weight	5.9 Kg
Length x Height	453 x 263 mm
Vibration Level	9.4 m/s <sup>2</sup>



CONSTRUCTION TOOLS - SDS MAX COMBI HAMMERS

**5KG SDS-MAX CHIPPING HAMMER**

**D25810K**

Power Output	1050W
Max. Impact Energy	8.5 J
Impact Energy (EPTA 05/2009)	7.1 J
Blows Per Minute	3150 bpm
Chisel Positions	18
Weight	5.6 Kg
Length x Height	462 mm x 263 mm
Vibration Level	8.5 m/s <sup>2</sup>



CONSTRUCTION TOOLS - 5KG CHIPPING HAMMERS



## 45MM SDS MAX ROTARY HAMMER

**D25614K**

Power Input	1350 W
No-load speed	190–380 min <sup>-1</sup>
No-load beats per minute	1450–2900 bpm
Single impact energy (EPTA 05/2009)	10.5 J
Maximum drilling range in concrete	45 mm
Maximum core drilling range in concrete	125 mm
Weight	7.8 Kg

**RE-LAUNCH**


## 48MM SDS MAX ROTARY HAMMER

**D25733K**

Power Input	1600 W
No-load speed	177–355 min <sup>-1</sup>
No-load beats per minute	1350–2705 bpm
Single impact energy (EPTA 05/2009)	13.3 J
Maximum core drilling range in concrete	48 mm
Weight	9.5 Kg

**RE-LAUNCH**

**with anti-rotation**

## 52MM SDS MAX ROTARY HAMMER

**D25773K**

Power Input	1700 W
No-load speed	145–290 min <sup>-1</sup>
No-load beats per minute	1105–2210 bpm
Single impact energy (EPTA 05/2009)	19.4 J
Maximum core drilling range in concrete	52 mm
Weight	10.6 Kg

**RE-LAUNCH**

**with anti-rotation**

**5KG HEX 17MM CHIPPING HAMMER****D25811K**

Power Output	1100W
Max. Impact Energy	8.5 J
Impact Energy (EPTA 05/2009)	7.1 J
Blows Per Minute	3150 bpm
Chisel Positions	18
Weight	5.7 Kg
Length x Height	477 mm x 263 mm
Vibration Level	8.5 m/s <sup>2</sup>

**1600W 10KG L SHAPED DEMOLITION HAMMER (MADE IN INDIA)****D25881K**

Power Output	1600 W
Single Impact Energy (EPTA)	17.5 J
No-Load Beats Per Minute	1060 - 2160 bpm
Chisel Positions	12
Weight	10.4 Kg
Size (Length x Height)	559 mm x 282 mm
Vibration Level	14.9 m/s <sup>2</sup>

**MADE IN INDIA****1550W 10KG SDS MAX DEMOLITION HAMMER, IN-LINE****D25901K**

Power Input	1550W
Max. Impact Energy	20.7 J
Impact Energy (EPTA 05/2009)	19 J
Blows Per Minute	1050 - 2100 bpm
Chisel Positions	12
Weight	10.9 Kg
Length x Height	690 x 250 mm
Vibration Level	8.0 m/s <sup>2</sup>



## 1600W 12KG SDS MAX DEMOLITION HAMMER

### D25951K

Power Output	1600W
Max. Impact Energy	30.1 J
Impact Energy (EPTA 05/2009)	24 J
Blows Per Minute	1621 bpm
Chisel Positions	12
Weight	13.6 Kg
Length x Height	750 mm x 250 mm
Vibration Level	8.8 m/s <sup>2</sup>



Po



**1600W 16KG DEMOLITION HAMMER**

**D25961K**

Power Output	1600W
Max. Impact Energy	38 J
Impact Energy (EPTA 05/2009)	35 J
Blows Per Minute	1450 bpm
Chisel Positions	12
Weight	16.9 Kg
Length x Height	760 mm x 260 mm
Vibration Level	6.8 m/s <sup>2</sup>



**2100W 30KG DEMOLITION BREAKER**

**D25981K**

Power Output	2100W
Max. Impact Energy	72 J
Impact Energy (EPTA 05/2009)	62 J
Blows Per Minute	960 bpm
Chisel Positions	12
Weight	31 Kg
Length x Height	780 mm x 620 mm
Vibration Level	4.8 m/s <sup>2</sup>



**1270W 110MM TILE SAW**

**DW862**

Power Input	1270W
Blade Diameter	110 mm
Blade Bore Diameter	20 mm
No Load Speed	13500 rpm
Depth of Cut at 90°	34 mm
Weight	3.0 Kg
Length x Height	252 x 166 mm



**1700W 430MM ALLIGATOR SAW**

**DWE397**

Power Input	1700W
No Load Stroke Rate	3000 spm
Stroke Length	40 mm
Blade Length	430 mm
Blade Stop	0.2s
Weight	5.5 Kg
Length x Height	918 x 219 mm



**1/2" HEAVY DUTY IMPACT WRENCH, 440NM**

**DW292**

Power Input	710W
Max. Torque	440 Nm
No Load Speed	2200 rpm
Impacts Per Minute	2700 ipm
Weight	3.2 Kg
Length x Height	292 x 216 mm



\* Till Stocks Last

**10MM VSR DRILL, 550W (MADE IN INDIA)****DWD014**

Power Input	550W
Chuck Capacity	10 mm
No Load Speed	0-2800 rpm
Max. Drilling Capacity [Wood]	10 mm
Max. Drilling Capacity [Metal]	28 mm
Weight	1.3 Kg
Length x Height	215 x 170 mm

**10MM ROTARY DRILL WITH KEYLESS CHUCK, 701W****DWD112S**

Power Input	701W
Chuck Capacity	10 mm
No Load Speed	0-2500 rpm
Max. Torque	10.9 Nm
Max. Drilling Capacity [Wood]	25 mm
Max. Drilling Capacity [Metal]	10 mm
Weight	1.8 Kg
Length x Height	230 x 190 mm



**13MM IMPACT DRILL, 750W (MADE IN INDIA)****DWD024**

Power Input	750W
Chuck Capacity	13 mm
No Load Speed	0-2800 rpm
Blows Per Minute	0-47600 bpm
Max. Drilling Capacity [Wood]	25 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	16 mm
Weight	1.82 Kg
Length x Height	255 x 180 mm

**750W, 100MM ANGLE GRINDER (MADE IN INDIA)****DW810**

Power Input	750 W
Disc Diameter	100 mm
Switch Type	Toggle
No Load Speed	11000 rpm
Spindle Thread	M10
Weight	1.8 Kg
Length x Height	270 x 80 mm

**750W 100MM ULTRA SLIM ANGLE GRINDER****DWE750S**

Power Input	750 W
Disc Diameter	100 mm
Switch Type	Slide
No Load Speed	12000 rpm
Spindle Thread	M10
Weight	1.64 Kg
Length x Height	345 x 96 mm



**850W, 100MM ANGLE GRINDER (MADE IN INDIA)**

**DW801**

Power Input	850 W
Disc Diameter	100 mm
Switch Type	Toggle
No Load Speed	11000 rpm
Spindle Thread	M10
Weight	1.9 Kg
Length x Height	270 x 80 mm



**850W, 100MM ANGLE GRINDER WITH SLIDE SWITCH (MADE IN INDIA)**

**DW802**

Power Input	850 W
Disc Diameter	100 mm
Switch Type	Slide
No Load Speed	11000 rpm
Spindle Thread	M10
Weight	1.8 Kg
Length x Height	270 x 80 mm



**850W 100MM SAG WITH PADDLE SWITCH (MADE IN INDIA)**

**DWE8200PL**

Power Input	850 W
Disc Diameter	100 mm
Switch Type	Paddle
No Load Speed	12000 rpm
Spindle Thread	M10
Weight	1.8 Kg
Length x Height	270 mm x 80 mm



**1000W, 100MM ANGLE GRINDER (MADE IN INDIA)****DW803**

Power Input	1000 W
Disc Diameter	100 mm
Switch Type	Toggle
No Load Speed	12000 rpm
Spindle Thread	M10
Weight	1.9 Kg
Length x Height	270 x 80 mm

**1010W, 100MM ANGLE GRINDER WITH DUST EJECTION TECHNOLOGY (MADE IN INDIA)****DWE8300S**

Power Input	1010 W
No-Load/Rated Speed	11000 min <sup>-1</sup>
Wheel Diameter	100 mm
Spindle Diame	M10
Spindle Length	18.5 mm
Switch Style	Silde
Weight	1.85 Kg



**950W, 100MM ANGLE GRINDER- VAR SPEED, NVR, SOFT START**

**DWE4118**

Power Input	950W
Disc Diameter	100 mm
Switch Type	Slide
No Load Speed	3000–11000 rpm
Spindle Thread	M14
Weight	2 Kg
Length x Height	270 x 80 mm



**950W, 125MM ANGLE GRINDER- VAR SPEED, NVR, SOFT START (MADE IN INDIA)**

**DWE4119**

Power Input	950W
Disc Diameter	125 mm
Switch Type	Slide
No Load Speed	3000–11000 rpm
Spindle Thread	M14
Weight	1.8 Kg
Length x Height	270 x 80 mm



**1400W 125MM ANGLE GRINDER RAT-TAIL DESIGN (MADE IN INDIA)**

**DW831**

Power Input	1400W
Disc Diameter	125 mm
Switch Type	Trigger
No Load Speed	11000 rpm
Spindle Thread	M14
Weight	3.1 Kg
Length x Height	290 x 80 mm



**950W, 125MM ANGLE GRINDER (MADE IN INDIA)****DWE4115**

Power Input	950W
Disc Diameter	125 mm
Switch Type	Slide
No Load Speed	12000 rpm
Spindle Thread	M14
Weight	1.8 Kg - RATALE
Length x Height	270 x 80 mm

**1100W 125MM ANGLE GRINDER (MADE IN INDIA)****DWE4215**

Power Input	1200W
Disc Diameter	125 mm
Switch Type	Slide
No Load Speed	11500 rpm
Spindle Thread	M14
Weight	1.9 Kg
Length x Height	285 x 80 mm
DES Technology	


**1400W 125MM ANGLE GRINDER (MADE IN INDIA)****DWE4235**

Power Input	1400W
Disc Diameter	125 mm
Switch Type	Slide
No Load Speed	11500 rpm
Spindle Thread	M14
Weight	2.1 Kg
Length x Height	285 x 80 mm
DES Technology	



**1400W 125MM SAG WITH PADDLE SWITCH & DES (MADE IN INDIA)****DWE4233**

Power Input	1400 W
Disc Diameter	125 mm
Switch Type	Padd
No Load Speed	11500 RPM
Spindle Thread	M14
Weight	1.85 Kg

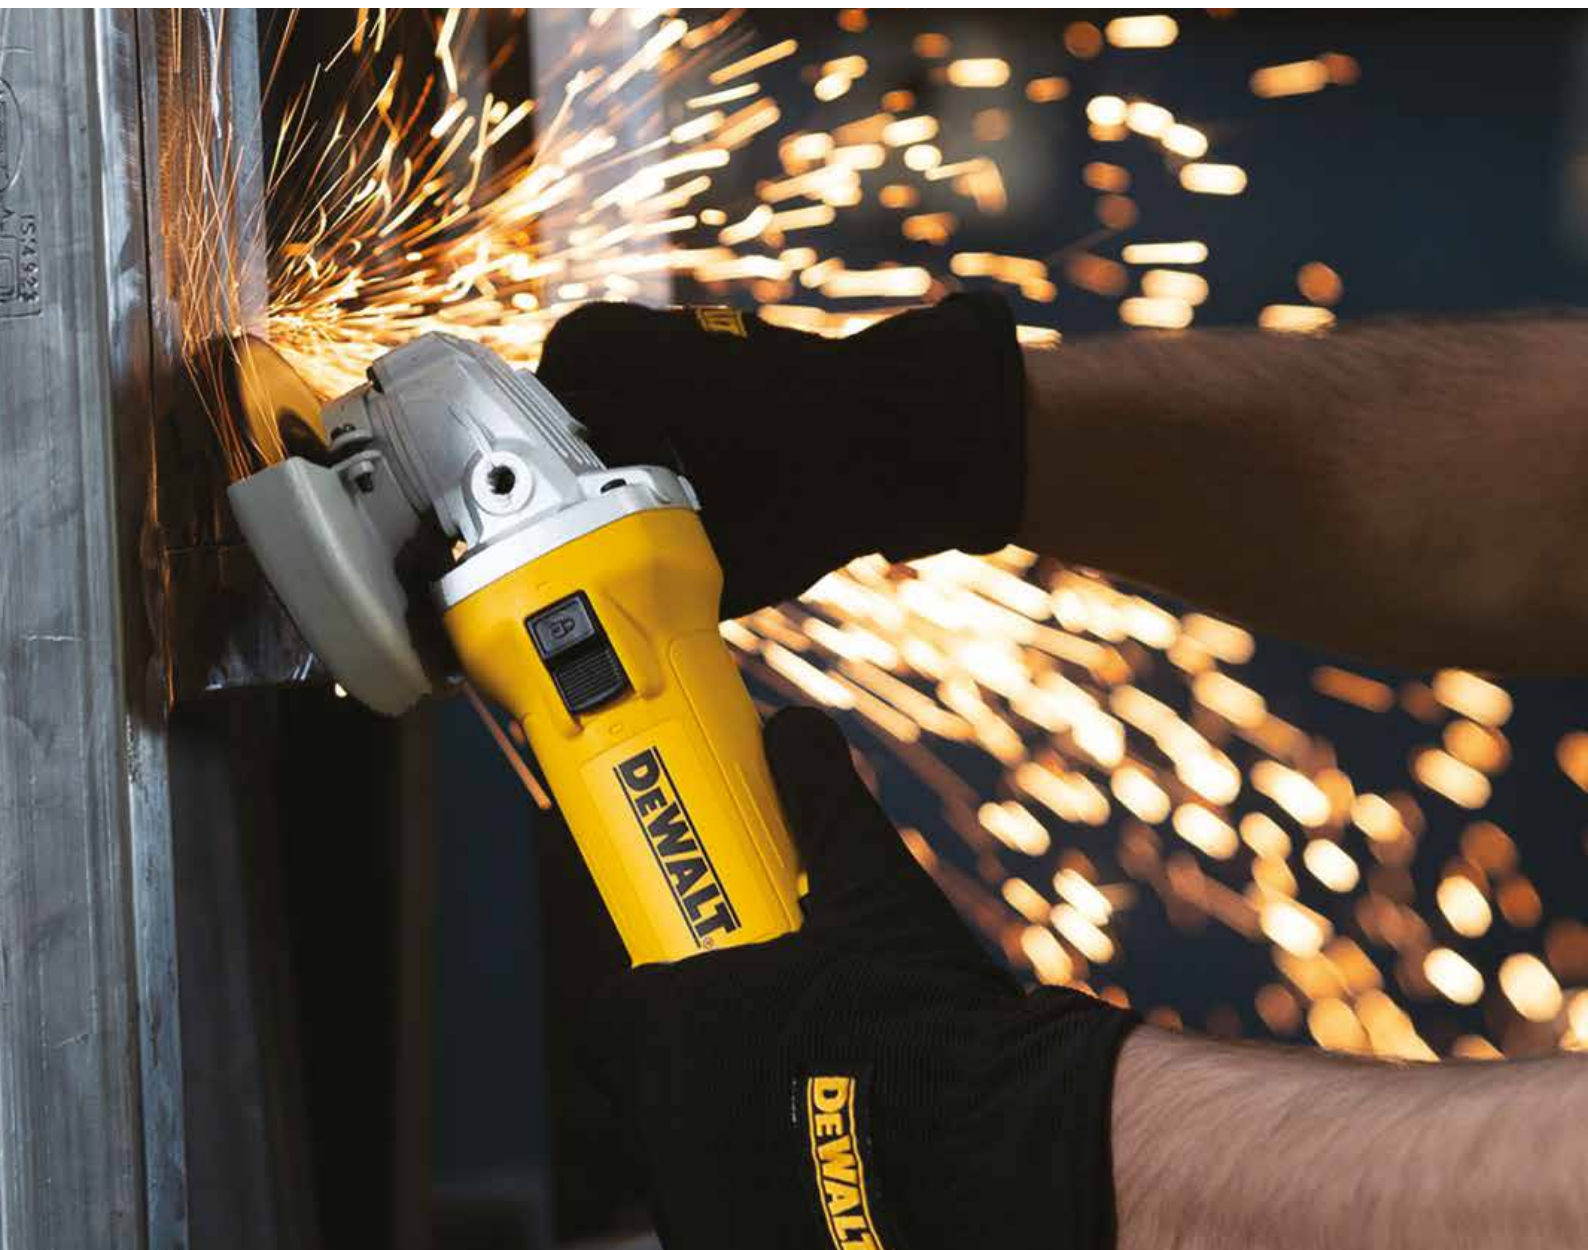**MADE IN INDIA**

**2200W, 180MM LAG (MADE IN INDIA)****DWE493**

Power Input	2200W
Disc Diameter	180 mm
Switch Type	Trigger
No Load Speed	8500 rpm
Spindle Thread	M14
Weight	5.1 Kg
Length x Height	484 x 112 mm

**MADE IN INDIA**  
WITH PRIDE**2200W 180MM LOW VOLTAGE LAG (MADE IN INDIA)****DWE493-B4**

Power Input	2200W
Disc Diameter	180 mm
Switch Type	Trigger
No Load Speed	8500 rpm
Spindle Thread	M14
Weight	5.2 Kg
Length x Height	484 x 112 mm

**MADE IN INDIA**  
WITH PRIDE**Low Voltage**

**2600W, 180MM LAG (MADE IN INDIA)**

**DWE497**


Power Input	2600W
Disc Diameter	180 mm
Switch Type	Trigger
No Load Speed	8500 rpm
Spindle Thread	M14
Weight	5.4 Kg
Length x Height	490 x 145 mm



**2200W, 180MM ANGLE GRINDER (MADE IN INDIA)**

**D28413**

Power Input	2200W
Disc Diameter	180 mm
Switch Type	Paddle
No Load Speed	8500 rpm
Spindle Thread	M14
Weight	4.7 Kg
Length x Height	520 x 145 mm

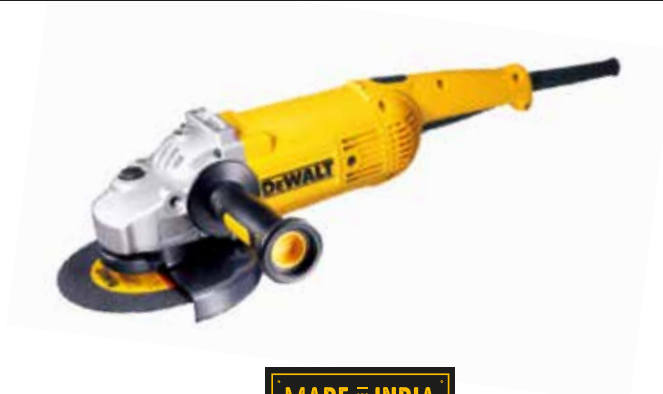

**2600W, 180MM LAG WITH PERFORM & PROTECT (MADE IN INDIA)**

**DWE4597**

Power Input	2600W
Disc Diameter	180 mm
Switch Type	Paddle
No Load Speed	8500 rpm
Spindle Thread	M14
OverLoad Protection	Yes
Weight	5.8 Kg
Length x Height	520 x 151 mm



**2200W, 230MM LAG (MADE IN INDIA)****DWE492**

Power Input	2200W
Disc Diameter	230 mm
Switch Type	Trigger
No Load Speed	6600 rpm
Spindle Thread	M14
Weight	5.2 Kg
Length x Height	490 x 151 mm

**2600W, 230MM LAG (MADE IN INDIA)****DWE496**

Power Input	2600W
Disc Diameter	230 mm
Switch Type	Trigger
No Load Speed	6500 rpm
Spindle Thread	M14
Weight	5.4 Kg
Length x Height	490 x 145 mm

**2600W, 230MM LAG WITH PERFORM & PROTECT (MADE IN INDIA)****DWE4579**

Power Input	2600W
Disc Diameter	230 mm
Switch Type	Paddle
No Load Speed	6500 rpm
Spindle Thread	M14
OverLoad Protection	Yes
Weight	5.9 Kg
Length x Height	520 x 145 mm



**450W, 6MM HEAVY DUTY DIE GRINDER WITH PADDLE SWITCH (MADE IN INDIA)**

**DWE487N**

Power Input	450W
Collet Size	6 mm
Switch Type	Paddle
No Load Speed	25000 rpm
Max. Wheel Diameter	38 mm
Spindle Thread	M15
Weight	1.6 Kg
Length	356 mm



**450W, 6MM SLIDE SWITCH DIE GRINDER (WITH LOCK-ON) (MADE IN INDIA)**

**DWE4884**

Power Input	450W
Collet Size	6 mm
Switch Type	Slide
No Load Speed	25000 rpm
Max. Wheel Diameter	38 mm
Spindle Thread	M15
Weight	1.6 Kg
Length	356 mm



**1300W BRUSHLESS VARIABLE SPEED DIE GRINDER**

**DWE4997**

Power Input	1300 W
No Load Speed	7500-25000 min <sup>-1</sup>
Collet Size	6 mm
Weight	2.4 Kg



**2200W 355MM HEAVY DUTY CHOPSAW (MADE IN INDIA)**
**DW871**

Voltage	220-240V
Power Input	2200W
No Load Speed	3800 min <sup>-1</sup>
Min. peripheral speed cutting disc	72 m/s
Disc Diameter	355 mm
Disc Bore	25.4 mm
Disc Body Thickness	3.0 mm
Thread Size of Spindle	M10
Cross-Cutting Capacity at 90°	
Circular	125 mm
Square	120 x 120 mm
Rectangular	115 x 160 mm
Angular	140 x 140 mm
Weight	18 Kg


**2300W 355MM INDUSTRIAL CHOPSAW (MADE IN INDIA)**
**D28730**

Voltage	230V
Type	20
Power Input	2300W
No Load Speed	4200 min <sup>-1</sup>
Min. peripheral speed cutting disc	80 m/s
Disc Diameter	355 mm
Disc Bore	25.4 mm
Disc Body Thickness	3.0 mm
Thread Size of Spindle	M10
Type of Cutting Disc Straight, non-recessed	
Cross-Cutting Capacity at 90°	
Circular	125 mm
Square	115 x 115 mm
Rectangular	115 x 130 mm
Angular	120 x 120 mm
Cross-Cutting Capacity at 45°	
Circular	115 mm
Square	98 x 98 mm
Rectangular	95 x 105 mm
Angular	105 x 105 mm
Weight	16 Kg



## 2200W 355MM CHOPSAW (MADE IN INDIA)

**D28870**

Voltage	220-240V
Power Input	2200W
No Load Speed	3800 min <sup>-1</sup>
Min. peripheral speed cutting disc	80 m/s
Disc Diameter	355 mm
Disc Bore	25.4 mm
Disc Body Thickness	3.1 mm
Type of Cutting Disc	Straight, non-recessed
Cross-Cutting Capacity at 90°	
Circular	130 mm
Square	120 x 120 mm
Rectangular	100 x 200 mm
Angular	140 x 140 mm
Cross-Cutting Capacity at 45°	
Circular	130 mm
Square	110 x 110 mm
Rectangular	100 x 140 mm
Angular	120 x 120 mm
Weight	18.5 Kg



## 1200W 50MM 2 SPEED MAGNETIC DRILL PRESS

**DWE1622K**

Power Input	1200W
Speed Settings	2 speed
No Load Speed	300/450 rpm
Cutter Holder	19 mm Weldon shank (3/4")
Max. Cutting Depth with Cutters	50 mm
Max. Cutting Diameter with Cutters	50 mm
Drill Point Pressure	317 kg
Clamping Force	3800 N
Stroke Length	147 mm
Weight	14.55 Kg
Magnetic Base Dimensions	180 x 84 mm



## 7" CORDED POLISHER

**DWP849X**

Power Input	1250 W
No Load Speed	0-600/0-3500 rpm
Spindle Thread	M14
Weight	3.0 Kg
Length x Height	480 x 135 mm



## 1650W 254MM COMPOUND MITRE SAW

### DW714

Voltage	220-240V
Type	1
Power Input	1650W
Blade Diameter	254 mm
Blade Thickness	3.2 mm
Bore Diameter	25.4 mm
Max. Blade Speed	4600 min <sup>-1</sup>
Max. Cross-cut Capacity 90°	130 mm
Max. Mitre Capacity 45°	91 mm
Max. Depth of Cut 90°	89 mm
Max. Depth of Bevel Cross-cut 45°	50 mm
Mitre (Max. Positions)	Left 47° Right 52°
Bevel (Max. Positions)	Left 45° Right 0°



## 1600W 305MM SINGLE BEVEL MITRE SAW

### DWS715

Power Input	1600W
Blade Speed	4000 rpm
Blade Diameter	305 mm
Blade Bore Diameter	25.4 mm
Bevel Capacity	48/-3°
Mitre Capacity [right/left]	45 / 45°
Cutting Capacity at 90°/90° (W x H)	203 x 72 mm
Cutting Capacity at 90°/45° (W x H)	203 x 47 mm
Cutting Capacity at 45°/90° (W x H)	142 x 72 mm
Max. Cutting Capacity at 45°/45°	142 x 47 mm
Max. Depth of Cut [Saws]	99 mm
Weight	19 Kg
Length x Height	770 x 396 mm



**1675W 305MM SLIDE MITRE SAW**
**DWS780**

Power Input	1675W
Blade Speed	1900 - 3800 rpm
Blade Diameter	305 mm
Blade Bore Diameter	30 mm
Bevel Capacity	49°
Mitre Capacity [right/left]	60 / 50°
Cutting Capacity at 90°/90° (W x H)	345 x 76 mm
Cutting Capacity at 90°/45° (W x H)	244 x 76 mm
Cutting Capacity at 45°/90° (W x H)	268 x 63 mm
Max. Cutting Capacity at 45°/45°	212 x 76 mm
Max. Depth of Cut [Saws]	170 mm
Weight	24.8 Kg
Length x Height	770 x 396 mm


**500W JIGSAW, 800-3100SPM, 20MM STROKE LENGTH, 2.7KGS**
**DWE349**

Power Input	500W
No Load Stroke Rate	800-3100 spm
Stroke Length	20 mm
Bevel Capacity	45°
Max. Depth of Cut (Wood)	85 mm
Max. Depth of Cut (Steel)	10 mm
Max. Depth of Cut (Non Ferrous Metal)	20 mm
Keyless Blade Change	Yes
Weight	3 Kg
Length x Height	230 X 200 mm


**701W JIGSAW, 0-3100SPM, 26MM STROKE LENGTH, 2.6KGS**
**DW331K**

Power Input	701W
No Load Stroke Rate	0-3100 spm
Stroke Length	26 mm
Bevel Capacity	45°
Max. Depth of Cut (Wood)	130 mm
Max. Depth of Cut (Steel)	12 mm
Max. Depth of Cut (Non Ferrous Metal)	30 mm
Keyless Blade Change	Yes
Weight	2.6 Kg
Length x Height	250 x 210 mm



**1500W 184MM CIRCULAR SAW**

**DWE5615**

Voltage	220 - 240V
Power Input	1500W
No-Load Speed	5500 min <sup>-1</sup>
Blade Diameter	184 mm
Maximum depth of Cut at	
90°	65 mm
45°	46 mm
Blade bore	20 mm
Bevel angle adjustment	5°
Weight	4 Kg



**550W PORTABLE PLANER**

**D26676**

Power Input	550W
No Load Speed	17000 rpm
Max. Depth of Cut	1.5 mm
Rebating Depth	10 mm
Planer Width	82 mm
Shoe Length	309 mm
Drum Diameter	54 mm
Weight	2.72 Kg
Length x Height	290 X 180 mm



## 1800W PORTABLE THICKNESS PLANER

### DW733

Power Input	1800W
No Load Speed	10000 rpm
Max. Capacity	64-315 mm (Width)
Max. Depth of Cut	3.2 mm
Max. Planing Depth	2 mm
Max. Thicknesser Capacity	152 mm (Height)
Feed Rate	8 m/min
Overload Protection	Yes
Weight	33.6 Kg
Length x Height	520 x 445 mm



## 250mm 2000W LIGHTWEIGHT TABLE SAW

### DWE7492

Power Input	2000W
Blade Speed	4800 rpm
Blade Diameter	250 mm
Blade Bore Diameter	30 mm
Bevel Capacity -	3 to 48 °
Max. Ripping Capacity [right / left]	825 x 558 mm
Max. Depth of Cut at 90°	77 mm
Max. Depth of Cut at 45°	55 mm
Table Size	680x650 mm
Weight	26.5 Kg
Depth	742 mm
Length x Height	577 x 425 mm



## 2000W, HEAT GUN WITH LCD DISPLAY (+/- 10°C)

### D26414

Power Input	2000W
Operating Temperature	50 - 600 °C
Air Flow	650 l/min
Weight	0.85 Kg
Length x Height	265 x 210 mm



**800W HEAVY DUTY INDUSTRIAL BLOWER**

**DWB800**

Power Input	800W
Speed	0 - 16000 rpm
Air Volume	4.5 m <sup>3</sup> /min
Suction	2.5 m <sup>3</sup> /min
Weight	1.8 Kg



SPECIALTY TOOLS

**HEAVY DUTY MITER SAW STAND**

**DWX723**



Compact Length	1765 mm
Extended Length	3835 mm
Include Disclaimer	* Stand only. Tool only for illustration

**125MM SURFACE GRINDING SHROUD**

**DWE46150**



Product Fitment	All 115 / 125 mm grinders
Max. Disc Diameter	125 mm
Accessories Accepted	Diamond Cups
Weight	0.3 Kg

ATTACHMENTS



**12V MAX\* LI-ION 3 X 360° LINE LASER (GREEN BEAM)**

**DCE089D1G**

Beam Colour	Green
Accuracy	±3mm / 10m
Self-Levelling Range	±4°
Max. Working Range	30 / 50m (with Detector)
Water Protection	IP65
Mounting Thread	1/4", 5/8"
Laser Class	2
Line Diagramm	360° Multiline
Battery Type	12V MAX



**ATOMIC 3X360 MULTILINE LASER (GREEN BEAM)**

**DCLE34031D1**

Beam Colour	Green
Accuracy	±3mm / 10m
Max. Working Range	40 / 100m (with Detector)
Water Protection	IP54
Mounting Thread	1/4", 5/8"
Laser Class	2
Line Diagramm	360° Multiline
Battery Type	20V MAX



**20V MAX\* ATOMIC CROSS LINE LASER (GREEN BEAM)**

**DCLE34021D1**

Beam Colour	Green
Accuracy	±3mm / 10m
Self-Levelling Range	±4°
Max. Working Range	55 / 100m (with Detector)
Water Protection	IP54
Mounting Thread	1/4", 5/8"
Laser Class	2
Line Diagramm	Cross Line
Battery Type	20V MAX



**12V MAX\* LI-ION 3 X 360° LINE LASER (RED BEAM)**

**DCE089D1R**

Beam Colour	Red
Accuracy	±3mm / 10m
Self-Levelling Range	±4°
Max. Working Range	20 / 50m (with Detector)
Water Protection	IP65
Mounting Thread	1/4", 5/8"
Laser Class	2
Line Diagramm	360° Multiline
Battery Type	12V MAX



**12V MAX\* LI-ION 5 SPOT CROSS LINE LASER (RED BEAM)**

**DCE0825D1R**

Beam Colour	Green
Accuracy	±3mm / 10m
Self-Levelling Range	±4°
Max. Working Range	15 / 50m (with Detector)
Number of Beams	7 - Cross Line plus 5 spots
Water Protection	IP65
Mounting Thread	1/4", 5/8"
Laser Class	2
Battery Type	12V MAX



**MULTI-LINE LASER (RED BEAM)**

**DW089K**

Beam Colour	Red
Accuracy	±3mm / 10m
Self-Levelling Range	±4°
Max. Working Range	15 / 50m (with Detector)
Number of Beams	3 - Horizontal, Vertical, Side
Water Protection	IP54
Mounting Thread	1/4"
Laser Class	2
Battery Type	AA Battery x 4



**CROSS LINE LASER (GREEN BEAM)**

**DW088CG**

Beam Colour	Green
Accuracy	±3mm / 10m
Self-Levelling Range	±4°
Max. Working Range	20 / 50m (with Detector)
Number of Beams	3 - Horizontal, Vertical, Side
Water Protection	IP54
Mounting Thread	1/4"
Laser Class	2
Battery Type	AA Battery x 3



**CROSS LINE LASER (RED BEAM)**

**DW088K**

Beam Colour	Red
Accuracy	±3mm / 10m
Self-Levelling Range	±4°
Max. Working Range	15 / 50m (with Detector)
Number of Beams	2 - Horizontal, Vertical
Water Protection	IP54
Mounting Thread	1/4"
Laser Class	2
Battery Type	AA Battery x3



**RED LINE LASER DETECTOR**

**DE0892**

Max. Working Range	50m
Power Source	1 x 9V

**INDICATORS**

Grade	Above	Slightly Above	On	Slightly Below	Below
<b>Audible Signals</b>	Fast Beep	Fast Beep	Steady Beep	Slow Beep	Slow Beep
<b>Display Icons</b>					








## GREEN LINE LASER DETECTOR

### DE0892G

Max. Working Range	50m
Power Source	1 x 9V

#### INDICATORS

Grade	Above	Slightly Above	On	Slightly Below	Below
<b>Audible Signals</b>	Fast Beep	Fast Beep	Steady Beep	Slow Beep	Slow Beep
<b>Display Icons</b>					



## ROTARY LASER LEVEL - RED

### DCE074D1R-QW

Beam Colour	Red
Accuracy	±3mm / 30m
Self-Levelling Range	±5°
Max. Working Range	45 / 457m (with Detector)
Laser Class	2
Manual Single Slope Mode	±10°
Water Protection	IP67
Rotation Speed	150, 300, 600, 1200 rpm
Battery Type	20V MAX / Flex Volt batteries



## MULTI-BEAM 5 POINTS LASER - POINTER + 1 BACKLINE

### DW085K

Beam Colour	Yellow
Accuracy	±6.35mm / 30m
Self-Levelling Range	±4°
Max. Working Range	30m
Water Protection	IP54
Battery Type	4 AA size batteries



**12V MAX\* LI-ION 3 X 360° LINE LASER (RED BEAM)**

**DCE089D1R**

Beam Colour	Red
Accuracy	±3mm / 10m
Self-Levelling Range	±4°
Max. Working Range	20 / 50m (with Detector)
Water Protection	IP65
Mounting Thread	1/4", 5/8"
Laser Class	2
Line Diagramm	360° Multiline
Battery Type	12V MAX



**12V MAX\* LI-ION 5 SPOT CROSS LINE LASER (RED BEAM)**

**DCE0825D1R**

Beam Colour	Green
Accuracy	±3mm / 10m
Self-Levelling Range	±4°
Max. Working Range	15 / 50m (with Detector)
Number of Beams	7 - Cross Line plus 5 spots
Water Protection	IP65
Mounting Thread	1/4", 5/8"
Laser Class	2
Battery Type	12V MAX



**MULTI-LINE LASER (RED BEAM)**

**DW089K**

Beam Colour	Red
Accuracy	±3mm / 10m
Self-Levelling Range	±4°
Max. Working Range	15 / 50m (with Detector)
Number of Beams	3 - Horizontal, Vertical, Side
Water Protection	IP54
Mounting Thread	1/4"
Laser Class	2
Battery Type	AA Battery x 4



**CROSS LINE LASER (GREEN BEAM)**

**DW088CG**

Beam Colour	Green
Accuracy	±3mm / 10m
Self-Levelling Range	±4°
Max. Working Range	20 / 50m (with Detector)
Number of Beams	3 - Horizontal, Vertical, Side
Water Protection	IP54
Mounting Thread	1/4"
Laser Class	2
Battery Type	AA Battery x 3



**CROSS LINE LASER (RED BEAM)**

**DW088K**

Beam Colour	Red
Accuracy	±3mm / 10m
Self-Levelling Range	±4°
Max. Working Range	15 / 50m (with Detector)
Number of Beams	2 - Horizontal, Vertical
Water Protection	IP54
Mounting Thread	1/4"
Laser Class	2
Battery Type	AA Battery x3



**RED LINE LASER DETECTOR**

**DE0892**

Max. Working Range	50m
Power Source	1 x 9V

**INDICATORS**

Grade	Above	Slightly Above	On	Slightly Below	Below
<b>Audible Signals</b>	Fast Beep	Fast Beep	Steady Beep	Slow Beep	Slow Beep
<b>Display Icons</b>					








## GREEN LINE LASER DETECTOR

### DE0892G

Max. Working Range	50m
Power Source	1 x 9V

#### INDICATORS

Grade	Above	Slightly Above	On	Slightly Below	Below
Audible Signals	Fast Beep	Fast Beep	Steady Beep	Slow Beep	Slow Beep
Display Icons					



## ROTARY LASER LEVEL - RED

### DCE074D1R-QW

Beam Colour	Red
Accuracy	±3mm / 30m
Self-Levelling Range	±5°
Max. Working Range	45 / 457m (with Detector)
Laser Class	2
Manual Single Slope Mode	±10°
Water Protection	IP67
Rotation Speed	150, 300, 600, 1200 rpm
Battery Type	20V MAX / Flex Volt batteries



## MULTI-BEAM 5 POINTS LASER - POINTER + 1 BACKLINE

### DW085K

Beam Colour	Yellow
Accuracy	±6.35mm / 30m
Self-Levelling Range	±4°
Max. Working Range	30m
Water Protection	IP54
Battery Type	4 AA size batteries

